




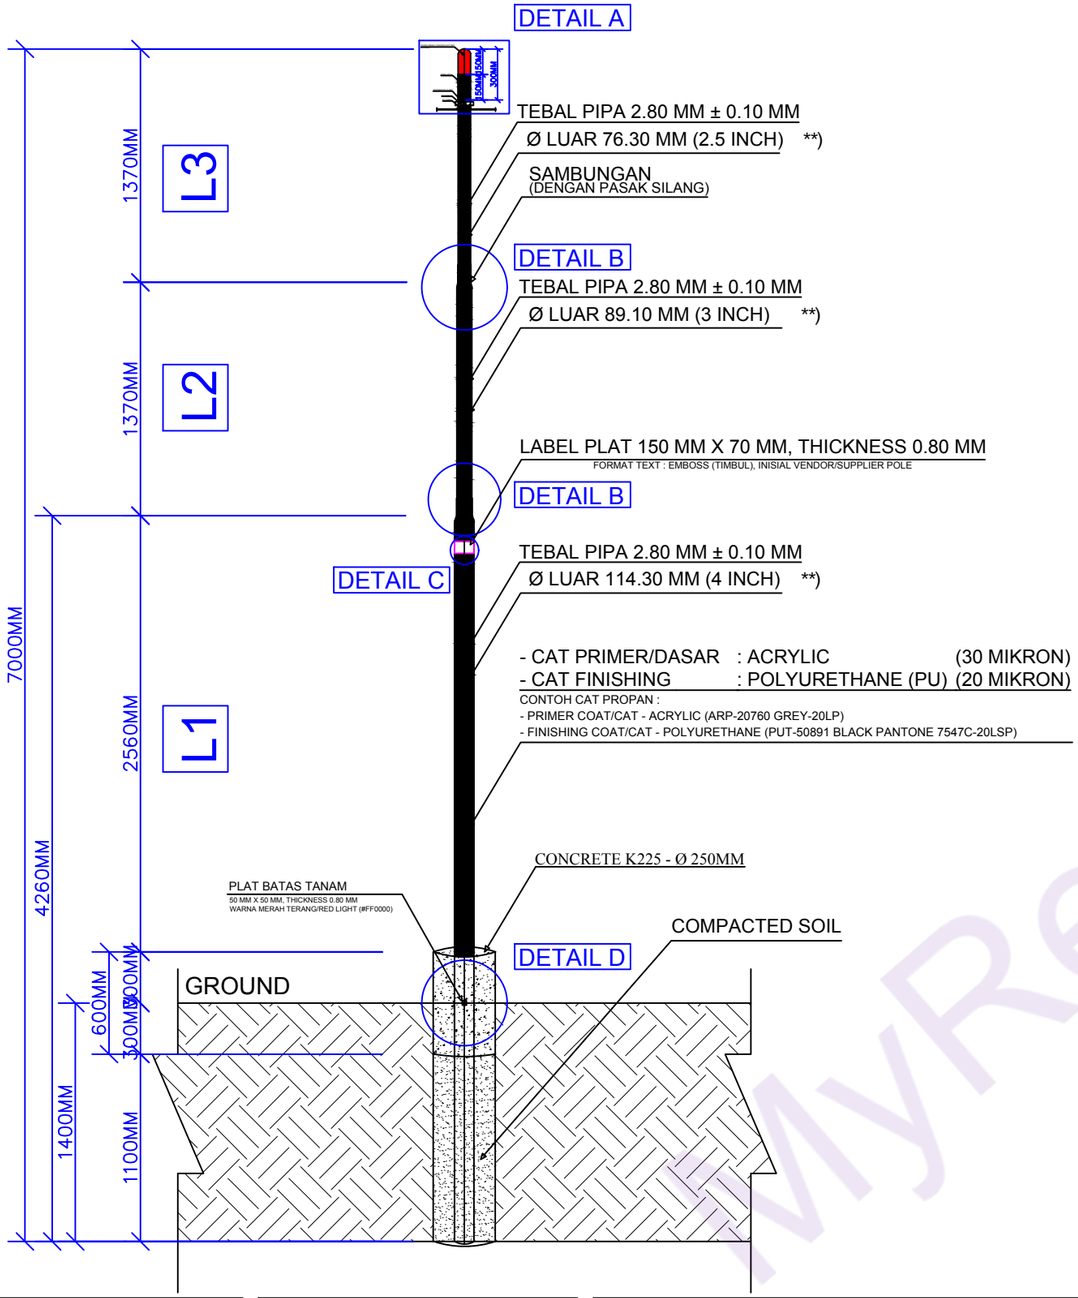

DETAIL A




DETAIL B




KETENTUAN/FORMAT PENULISAN LABEL POLE :	
1	LABEL DENGAN BAHAN PLAT STAINLESS STEEL
2	PLAT STAINLESS STEEL BERWARNA SILVER
3	FONT : TYPE "POPPINS" ; BOLD ; FONT SIZE 50 pts ; CENTRE ; FONT COLOR "BLACK"
4	PENULISAN LABEL EMBOSS/TIMBUL (NAIK PADA PERMUKAAN PLAT)
5	PEMASANGAN LABEL PADA POLE/TIANG DENGAN LAS

DETAIL C



DETAIL D

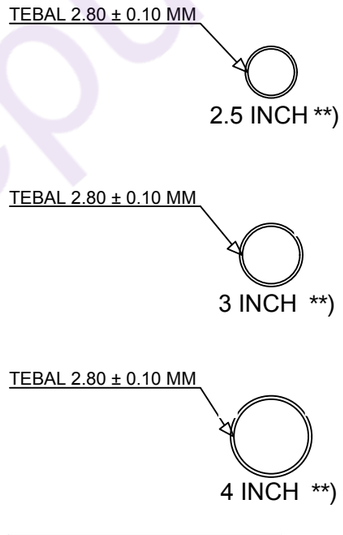

TABEL INFORMASI TOLERANSI

DIAMETER LUAR			
Inch	Standard	Maks	Min
2.5	76.3	76.6	75.3
3	89.1	89.5	88.0
4	114.3	115.0	113.1

PARAMETER	POLE 7M	POLE 9M
PANJANG TOTAL	(7000 ± 15) MM	(9000 ± 15) MM

SPESIFIKASI TEKNIS

1	BAHAN POLE/TIANG BESI BAJA BULAT TENGAH BERLUBANG
2	DIMENSI TIANG/POLE - POLE/TIANG 7M 4 INCH : A. DIAMETER BAWAH - Ø 4 INCH B. DIAMETER TENGAH - Ø 3 INCH C. DIAMETER ATAS - Ø 2.5 INCH
3	SPESIFIKASI BERAT MINIMUM 48 KG *)
4	PENGECATAN POLE/TIANG : A. CAT DASAR ANTI KARAT (ACRYLIC) B. CAT FINISHING (POLYURETHANE)
5	TOP POLE WARNA MERAH TERANG ATAU LIGHT RED (#FF0000)
6	INSTALASI LAPANGAN : - UNTUK INSTALASI TARIKAN CABLE A. SISI MAINFEEDER B. SISI HUBFEEDER DAN SUBFEEDER C. SISI CLUSTER HANYA UNTUK INSTALASI FDT SAJA - MAKSIMUM INSTALASI CABLE : A. CABLE 24C-48C : MAKS 6 CABLE B. CABLE 72C-96C : MAKS 5 CABLE C. CABLE 144C-288C : MAKS 4 CABLE - DAPAT DIGUNAKAN UNTUK INSTALASI PERANGKAT FDT (SISI CLUSTER), JC

LEGEND

HUB / CENTRAL OFFICE	HANDHOLE 40X40X60
SUB HUB / OPTICAL LINE TERMINAL	UNDERGROUND PEDESTAL
FDT FIBER DISTRIBUTION TERMINAL	NP PROPOSES NEW POLE 9m
FAT FIBER ACCESS TERMINAL / FAT **= SPLITTER CONFIG	NP PROPOSED NEW POLE 7m
OTB OPTICAL TERMINATION BOX	PLN GARDU PLN
HH HANDHOLE 80X80X130	STO TELKOM RUMAH KABEL TELKOM
HH HANDHOLE 20X20X20	LABEL CABLE LABEL CABLE
ONT-RES (RESIDENTIAL) OPTICAL NETWORK TERMINAL	LARGE TEE RADIUS
ONT-MDU (BUILDING) OPTICAL NETWORK TERMINAL	CR CABLE RISER
FIBER OPTIC CLOSURE	BA BORING ASPAL / BORING ASPHALT WORK
FIGURE EIGHT / FIBER SPARE COIL	BT BORING TANAH / BORING SOIL WORK
Sidewalk Guy / Down Guy	GT GALI TANAH / TRENCHING TYPE WORK

CABLE TYPE

AERIAL STRAND	FIBER 12/2T
UNDERGROUND STRAND	FIBER 24/4T
UG DROP DUCT	FIBER 36/6T
FEEDER CABLE ROUTE	FIBER 72/6T
FAT AREA LINE	FIBER 96/8T
	FIBER 144/12T
	FIBER 288/24T

MyRepublic
MYREPUBLIC PLAZA 1ST FLOOR
GREEN OFFICE PARK 6
BSD – TANGERANG 15345
Tel: +6221 319 2626

NAMA PROYEK / PROJECT NAME
STANDARD DESIGN POLE 7 M – 4 INCH SPECIFICATION

DRAWING SIGN & CHECK

DIGAMBAR / DRAWN: WAHYU SETIYONO	TANGGAL / DATE: 13 MARET 2025	TANDA TANGAN / SIGNATURE
DIPERIKSA / CHECKED: SAIPULLAH HAILANI	TANGGAL / DATE: 13 MARET 2025	TANDA TANGAN / SIGNATURE

RIWAYAT DOKUMEN / DOCUMENT HISTORY

REV.01 - 24 APRIL 2025

KATEGORI GAMBAR / DESIGN CATEGORY: AERIAL	REVISI / REVISION: REV.01
SATUAN / UNIT: SATUAN DALAM MM	SKALA / SCALE: 1 ; 100
ARAH / DIRECTION: N	NO. DOKUMEN / DOCUMENT NO: 011/AE/EMR-PLG/X/2023
	NO. GAMBAR / DRAWING NO: 011

APPROVAL MATRIX

PLANNING DEPT	PROJECT DEPT	OPERATION DEPT	CTO MYREPUBLIC
KRESNO AGUNG NUGROHO	PUJI YUWONO	ANGGA WISHNU WIJAYA	HENDRA GUNAWAN

NOTES :
*) BERDASARKAN KALKULATOR HITUNG BERAT TIANG BULAT, BERAT LEBIH DARI 48 KG
**) BERDASARKAN TABEL INFORMASI TOLERANSI

MyRepublic