


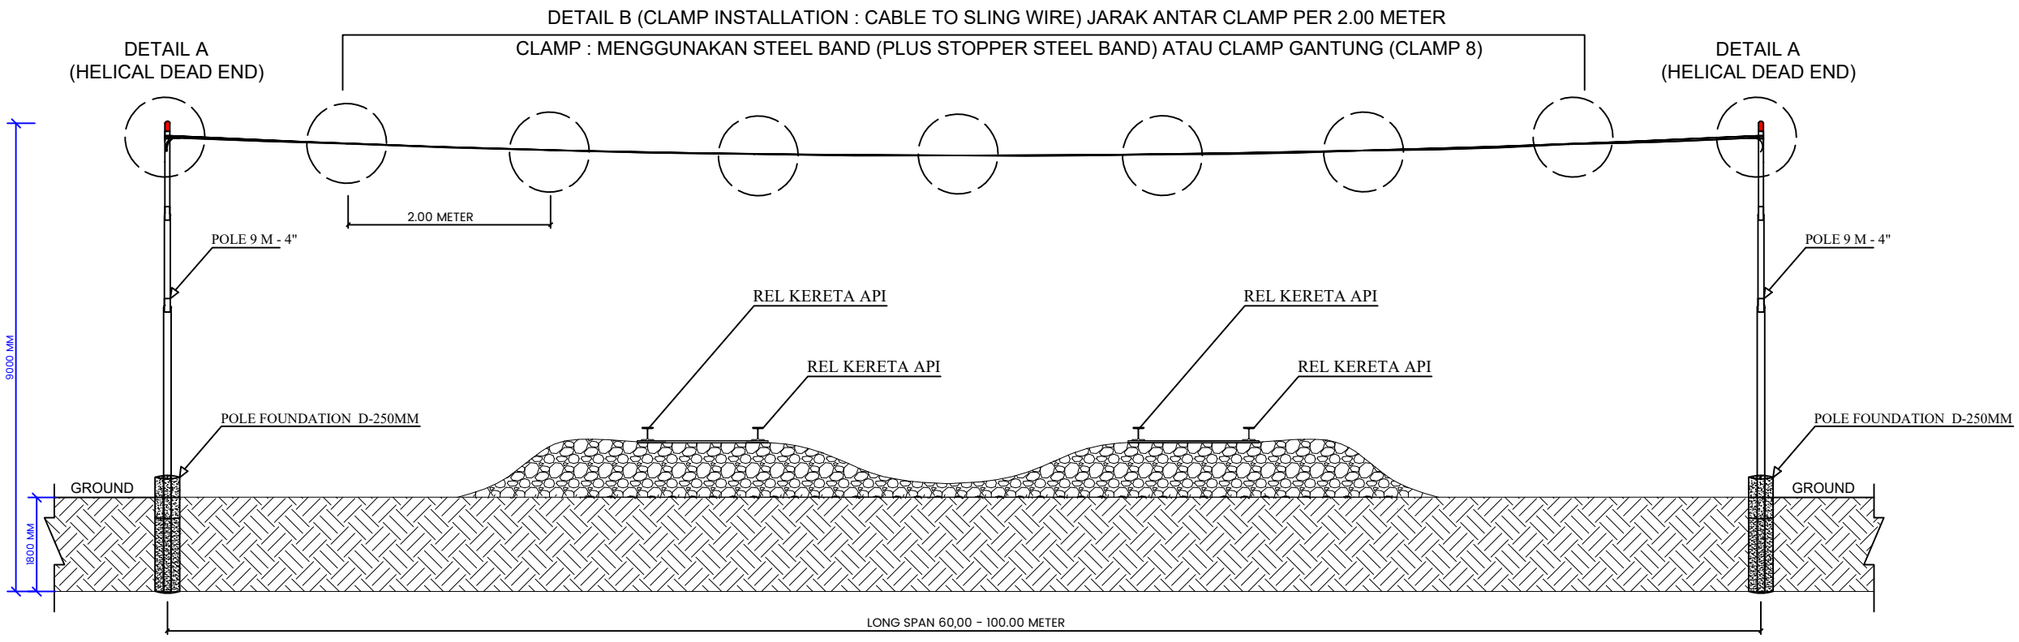


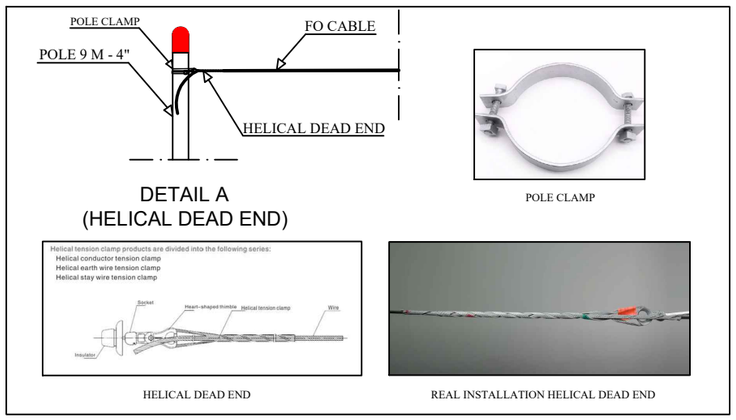

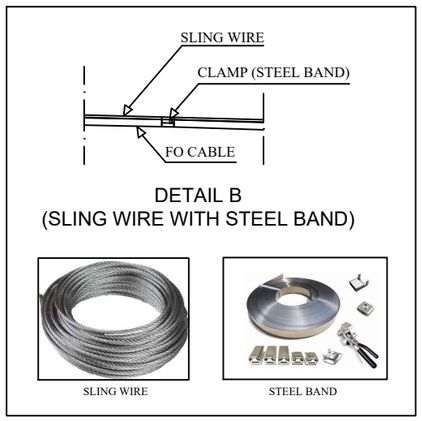

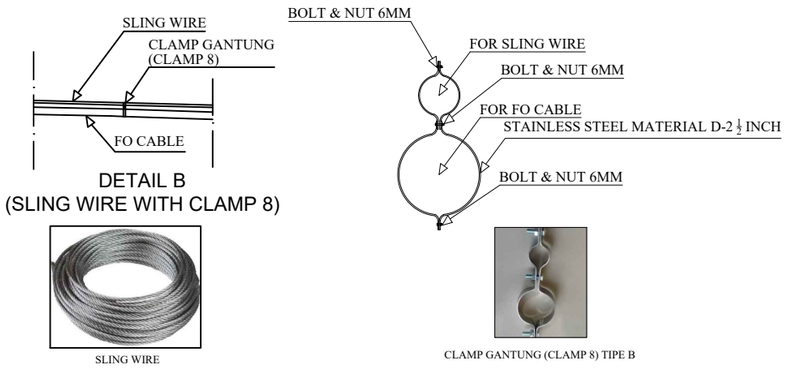

SPESIFIKASI TEKNIS

INSTALASI LONG SPAN 60 - 100 M :

- UNTUK FEEDER/CROSSING JALAN RAYA DENGAN REL KERETA API
- POLE/TIANG YANG DIGUNAKAN YAITU POLE/TIANG 9 M - 4 INCH
- CABLE DIINSTALL DENGAN SUPPORT OLEH SLING WIRE DAN DIKAITKAN DENGAN :
  1. STEEL BAND, ATAU
  2. CLAMP GANTUNG (CLAMP 8)
- CLAMP 8 (CLAM GANTUNG) DIPASANG PER 2 M

APPROVAL MATRIX

PLANNING DEPT	PROJECT DEPT	OPERATION DEPT	CTO MYREPUBLIC
KRESNO AGUNG NUGROHO	PUJI YUWONO	ANGGA WISHNU WIJAYA	HENDRA GUNAWAN

LEGEND

HUB / CENTRAL OFFICE	HANDHOLE 40X40X60
SUB HUB / OPTICAL LINE TERMINAL	UNDERGROUND PEDESTAL
FDT FIBER DISTRIBUTION TERMINAL	NP PROPOSES NEW POLE 9m
FAT FIBER ACCESS TERMINAL / FAT **= SPLITTER CONFIG	NP PROPOSED NEW POLE 7m
OTB OPTICAL TERMINATION BOX	PLN GARDU PLN
HH HANDHOLE 80X80X130	STO TELKOM RUMAH KABEL TELKOM
HH HANDHOLE 20X20X20	LABEL CABLE LABEL CABLE
ONT-RES (RESIDENTIAL) OPTICAL NETWORK TERMINAL	LARGE TEE RADIUS
ONT-MDU (BUILDING) OPTICAL NETWORK TERMINAL	CR CABLE RISER
FIBER OPTIC CLOSURE	BA BORING ASPAL / BORING ASPHALT WORK
FIGURE EIGHT / FIBER SPARE COIL	BT BORING TANAH / BORING SOIL WORK
Sidewalk Guy Down Guy	GT GALI TANAH / TRENCHING TYPE WORK

CABLE TYPE

AERIAL STRAND	FIBER 12/2T
UNDERGROUND STRAND	FIBER 24/4T
UG DROP DUCT	FIBER 36/6T
FEEDER CABLE ROUTE	FIBER 72/6T
FAT AREA LINE	FIBER 96/8T
	FIBER 144/12T
	FIBER 288/24T

MyRepublic
MYREPUBLIC PLAZA 1ST FLOOR
GREEN OFFICE PARK 6
BSD – TANGERANG 15345
Tel: +6221 319 2626

NAMA PROYEK / PROJECT NAME
STANDARD DESIGN CROSSING KAI
TOPOLOGY AERIAL (2 JALUR KAI)

DRAWING SIGN & CHECK

DIGAMBAR / DRAWN	TANGGAL / DATE	TANDA TANGAN / SIGNATURE
WAHYU SETIYONO	18/10/2023	
DIPERIKSA / CHECKED	**TANGGAL / DATE**	**TANDA TANGAN / SIGNATURE**
SAIPULLAH HAILANI	18/10/2023	

RIWAYAT DOKUMEN / DOCUMENT HISTORY

KATEGORI GAMBAR / DESIGN CATEGORY: AERIAL	REVISI / REVISION: –
SATUAN / UNIT: SATUAN DALAM MM	SKALA / SCALE: 1 ; 100
ARAH / DIRECTION: N	NO. DOKUMEN / DOCUMENT NO: 051/AE/EMR-PLG/III/2024
	NO. GAMBAR / DRAWING NO: 051