
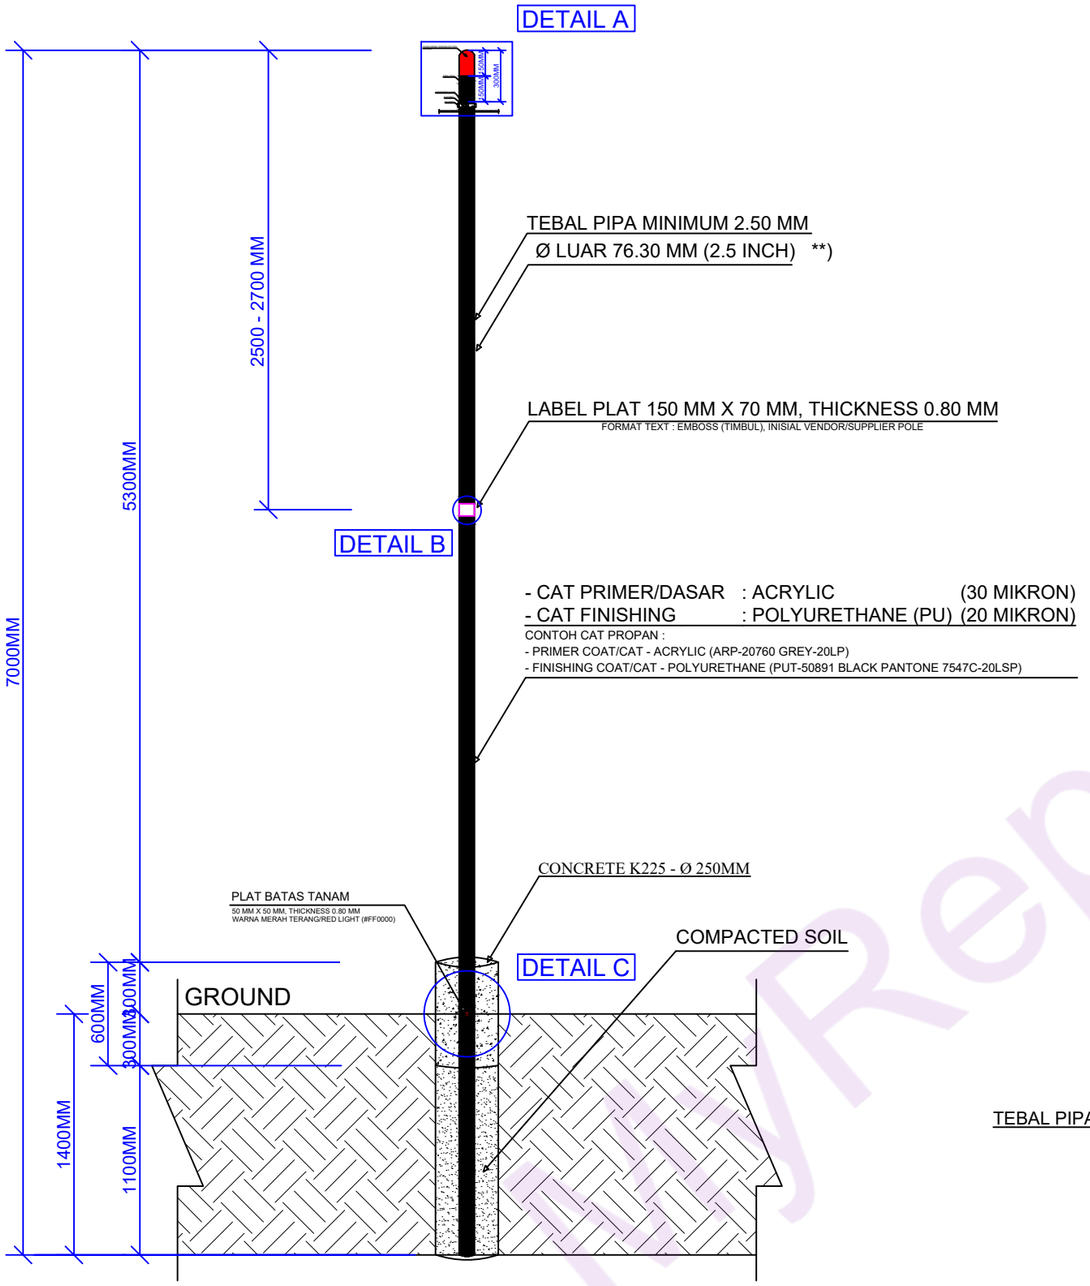



TABEL INFORMASI TOLERANSI

DIAMETER LUAR			
Inch	**Standard**	**Maks**	**Min**
2.5	76.3	76.6	75.3
3	89.1	89.5	88.0
4	114.3	115.0	113.1

TIPE TIANG	PANJANG
TIANG/POLE 9M	9000 ± 15 MM
TIANG/POLE 7M	7000 ± 15 MM
TIANG/POLE 6M	6000 ± 15 MM




DETAIL A

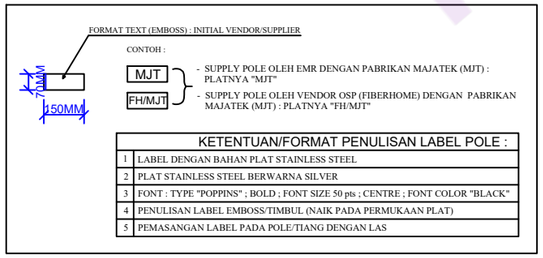


KETENTUAN/FORMAT PENULISAN LABEL POLE :	
1	LABEL DENGAN BAHAN PLAT STAINLESS STEEL
2	PLAT STAINLESS STEEL BERWARNA SILVER
3	FONT : TYPE "POPPINS" ; BOLD ; FONT SIZE 50 pts ; CENTRE ; FONT COLOR "BLACK"
4	PENULISAN LABEL EMBOSS/TIMBUL (NAIK PADA PERMUKAAN PLAT)
5	PEMASANGAN LABEL PADA POLE/TIANG DENGAN LAS

DETAIL B



DETAIL C



SPESIFIKASI TEKNIS

1	BAHAN POLE/TIANG BESI BAJA BULAT TENGAH BERLUBANG (KOIL SS400)
2	DIMENSI TIANG/POLE 7M : - DIAMETER : Ø 2.5 INCH - THICKNESS : MIN 2.50 MM
3	SPESIFIKASI BERAT = MIN 32 KG *)
4	TIANG/POLE DIAPLIKASIKAN UNTUK TIANG DISTRIBUSI DI DALAM CLUSTER
5	PENGECATAN POLE/TIANG : A. CAT DASAR ANTI KARAT (ACRYLIC) B. CAT FINISHING (POLYURETHANE)
6	TOP POLE WARNA MERAH TERANG ATAU LIGHT RED (#FF0000)

NOTES :
*) BERDASARKAN KALKULATOR PERHITUNGAN BERAT TIANG, BERAT LEBIH DARI 32 KG
**) BERDASARKAN TABEL INFORMASI TOLERANSI

APPROVAL MATRIX

PLANNING DEPT	PROJECT DEPT	OPERATION DEPT	CTO MYREPUBLIC
KRESNO AGUNG NUGROHO	PUJI YUWONO	ANGGA WISHNU WIJAYA	HENDRA GUNAWAN

LEGEND

HUB / CENTRAL OFFICE	HANDHOLE 40X40X60
SUB HUB / OPTICAL LINE TERMINAL	UNDERGROUND PEDESTAL
FDT FIBER DISTRIBUTION TERMINAL	NP PROPOSES NEW POLE 9m
FAT FIBER ACCESS TERMINAL / FAT **= SPLITTER CONFIG	NP PROPOSED NEW POLE 7m
OTB OPTICAL TERMINATION BOX	PLN GARDU PLN
HH HANDHOLE 80X80X130	STO TELKOM RUMAH KABEL TELKOM
HH HANDHOLE 20X20X20	LABEL CABLE
ONT–RES (RESIDENTIAL) OPTICAL NETWORK TERMINAL	LARGE TEE RADIUS
ONT–MDU (BUILDING) OPTICAL NETWORK TERMINAL	CR CABLE RISER
FIBER OPTIC CLOSURE	BA BORING ASPAL / BORING ASPHALT WORK
FIGURE EIGHT / FIBER SPARE COIL	BT BORING TANAH / BORING SOIL WORK
Sidewalk Guy / Down Guy	GT GALI TANAH / TRENCHING TYPE WORK

CABLE TYPE

AERIAL STRAND	FIBER 12/2T
UNDERGROUND STRAND	FIBER 24/4T
UG DROP DUCT	FIBER 36/6T
FEEDER CABLE ROUTE	FIBER 72/6T
FAT AREA LINE	FIBER 96/8T
	FIBER 144/12T
	FIBER 288/24T

MyRepublic
MYREPUBLIC PLAZA 1ST FLOOR
GREEN OFFICE PARK 6
BSD – TANGERANG 15345
Tel: +6221 319 2626

NAMA PROYEK / PROJECT NAME
STANDARD DESIGN POLE 7 M – 2.5 INCH WITH THICKNESS 2.5 MM (STAGE 7M)

DRAWING SIGN & CHECK

DIGAMBAR / DRAWN: WAHYU SETIYONO	TANGGAL / DATE: 11/08/2025	TANDA TANGAN / SIGNATURE
DIPERIKSA / CHECKED: SAIPULLAH HAILANI	TANGGAL / DATE: 11/08/2025	TANDA TANGAN / SIGNATURE

RIWAYAT DOKUMEN / DOCUMENT HISTORY
RELEASE DESIGN – 11/08/2025

KATEGORI GAMBAR / DESIGN CATEGORY: AERIAL	REVISI / REVISION: –
SATUAN / UNIT: SATUAN DALAM MM	SKALA / SCALE: 1 ; 100
ARAH / DIRECTION: N	NO. DOKUMEN / DOCUMENT NO: 093/AE/EMR–PLG/VIII/2025
	NO. GAMBAR / DRAWING NO: 093

MyRepublic