

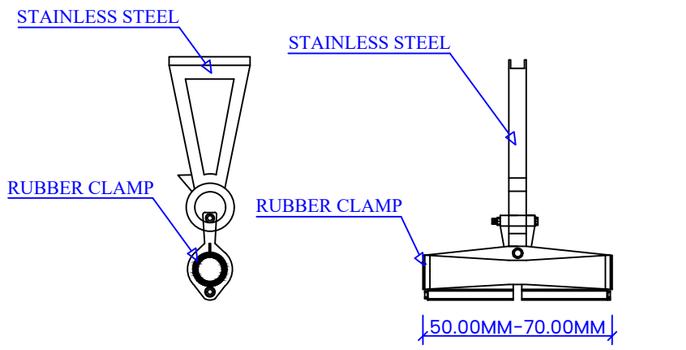


TAMPAK DEPAN TAMPAK SAMPING


DETAIL SUSPENSION (CLAMP A)

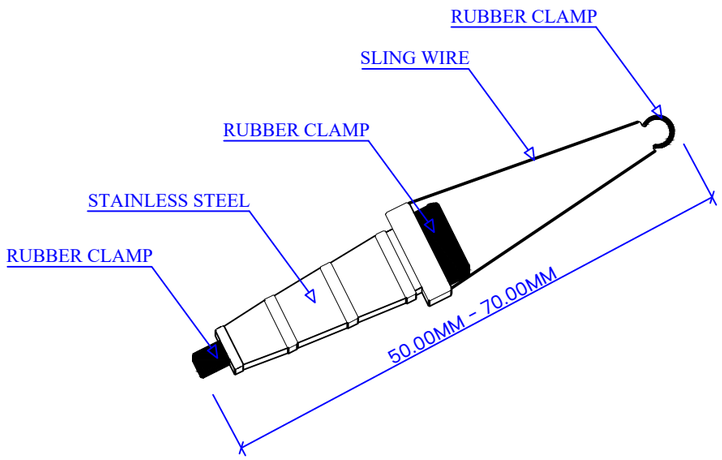

DETAIL DEAD END (CLAMP BUAYA)

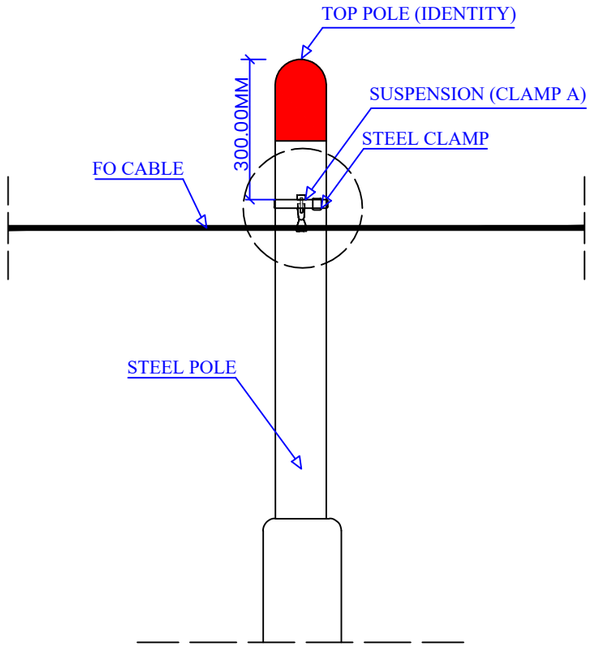

SUSPENSION IMPLEMENTATION

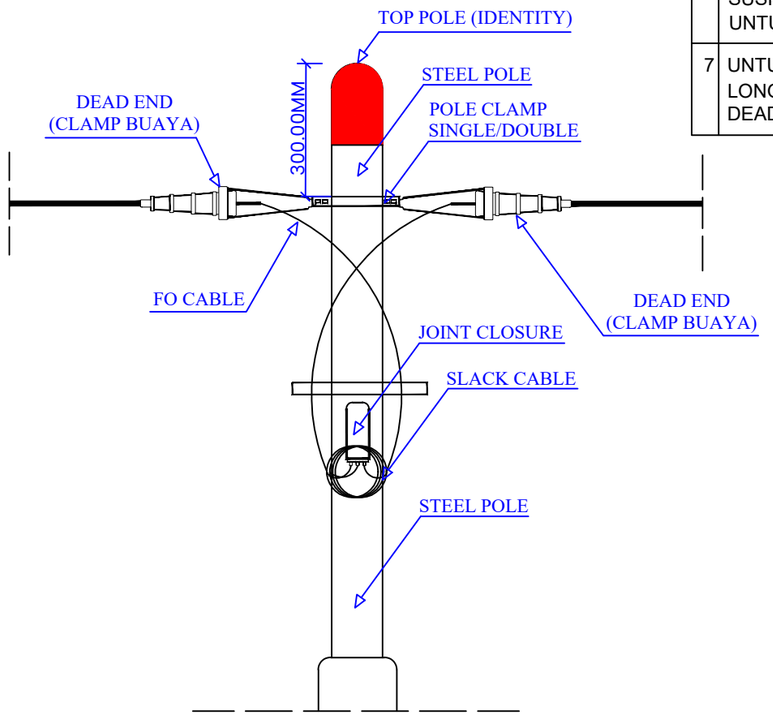

DEAD END IMPLEMENTATION

SPESIFIKASI TEKNIS

1	BAHAN MATERIAL : STAINLESS STEEL DENGAN KOMBINASI KARET (CLAMP)
2	DIMENSI : - SUSPENSION (CLAMP A) : 50.00MM-70.00MM - DEAD END (CLAM BUAYA) 50.00MM - 70.00MM DIMENSI MENGIKUTI DIAMETER CABLE
3	DEAD END (CLAMP BUAYA) UNTUK TIANG YANG TERDAPAT MATERIAL FDT, FAT, JOINT CLOSURE, DAN TIANG AKHIR
4	SUSPENSION (CLAMP A) UNTUK TIANG TANPA MATERIAL PASIF FDT, FAT, DAN JOINT CLOSURE
5	INSTALASI : - SUSPENSION (CLAMP A) INSTALASI DIIKAT LANGSUNG PADA POLE/TIANG DENGAN STEEL CLAMP - DEAD END (CLAMP BUAYA) INSTALASI DIKAITKAN LANGSUNG PADA POLE CLAMP SINGLE/DOUBLE TANPA MENGGUNAKAN SPAN WARTEL
6	REKOMENDASI INSTALLASI : DEAD END (CLAMP BUAYA) DAN SUSPENSION (CLAMP A) DIGUNAKAN UNTUK INSTALASI CABLE 24 C - 144 C
7	UNTUK IMPLEMENTASI FEEDER ATAU LONG SPAN MENGGUNAKAN HELICAL DEAD END

LEGEND

HUB / CENTRAL OFFICE	HH HANDHOLE 40X40X60
SUB HUB / OPTICAL LINE TERMINAL	UNDERGROUND PEDESTAL
FDT FIBER DISTRIBUTION TERMINAL	NP PROPOSES NEW POLE 9m
FAT FIBER ACCESS TERMINAL / FAT **= SPLITTER CONFIG	NP PROPOSED NEW POLE 7m
OTB OPTICAL TERMINATION BOX	PLN GARDU PLN
HH HANDHOLE 80X80X130	STO TELKOM RUMAH KABEL TELKOM
HH HANDHOLE 20X20X20	LABEL CABLE LABEL CABLE
ONT-RES (RESIDENTIAL) OPTICAL NETWORK TERMINAL	LARGE TEE RADIUS
ONT-MDU (BUILDING) OPTICAL NETWORK TERMINAL	CR CABLE RISER
FIBER OPTIC CLOSURE	BA BORING ASPAL / BORING ASPHALT WORK
FIGURE EIGHT / FIBER SPARE COIL	BT BORING TANAH / BORING SOIL WORK
Sidewalk Guy Down Guy	GT GALI TANAH / TRENCHING TYPE WORK

CABLE TYPE

AERIAL STRAND	FIBER 12/2T
UNDERGROUND STRAND	FIBER 24/4T
UG DROP DUCT	FIBER 36/6T
FEEDER CABLE ROUTE	FIBER 72/6T
FAT AREA LINE	FIBER 96/8T
	FIBER 144/12T
	FIBER 288/24T

MyRepublic
MYREPUBLIC PLAZA 1ST FLOOR
GREEN OFFICE PARK 6
BSD – TANGERANG 15345
Tel: +6221 319 2626

NAMA PROYEK / PROJECT NAME
STANDARD DESIGN SUSPENSION & DEAD END INSTALLATION

DRAWING SIGN & CHECK

DIGAMBAR / DRAWN: WAHYU SETIYONO	TANGGAL / DATE: 18/10/2023	TANDA TANGAN / SIGNATURE
DIPERIKSA / CHECKED: SAIPULLAH HAILANI	TANGGAL / DATE: 18/10/2023	TANDA TANGAN / SIGNATURE

RIWAYAT DOKUMEN / DOCUMENT HISTORY
1. REV.01 – 092021
2. REV.02 – 092022
3. REV.03 – 102023

KATEGORI GAMBAR / DESIGN CATEGORY: AERIAL	REVISI / REVISION: REV.03
SATUAN / UNIT: SATUAN DALAM MM	SKALA / SCALE: 1 ; 100
ARAH / DIRECTION: N	NO. DOKUMEN / DOCUMENT NO: 010/AE/EMR-PLG/X/2023
	NO. GAMBAR / DRAWING NO: 010

APPROVAL MATRIX

PLANNING DEPT	PROJECT DEPT	OPERATION DEPT	CTO MYREPUBLIC
KRESNO AGUNG NUGROHO	PUJI YUWONO	ANGGA WISHNU WIJAYA	HENDRA GUNAWAN