

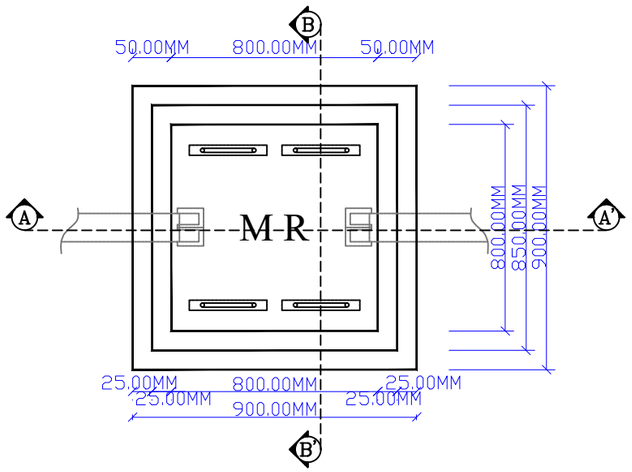



HAND HOLE PLAN




DETAIL PLAT L

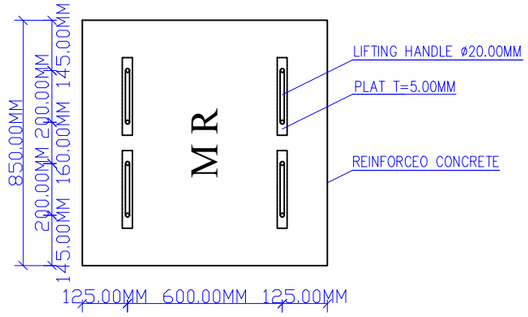


DETAIL COVER HH

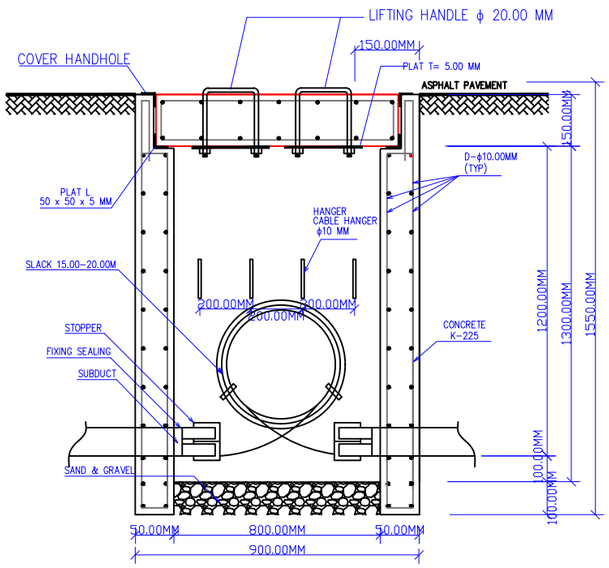


SECTION A-A'

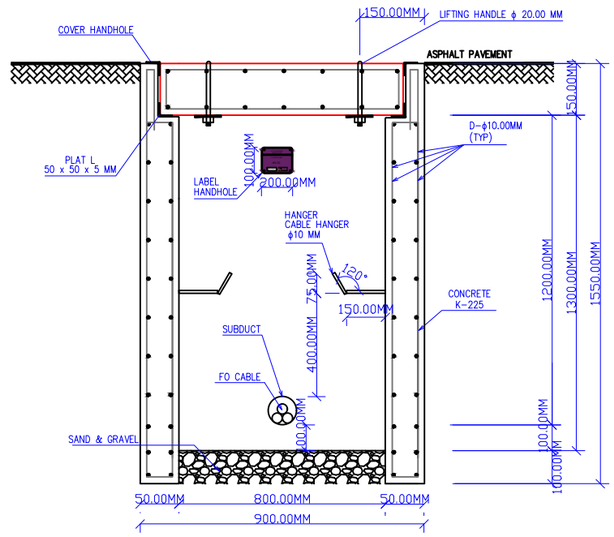

SECTION B-B'



LIFTING HANDLE COVER DETAIL

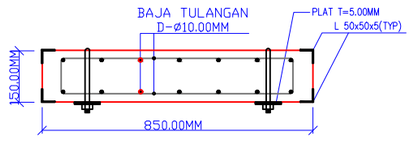

DETAIL A

SPESIFIKASI TEKNIS

1	KETENTUAN UMUM : - HH CONCRETE DIINSTALL PADA BADAN JALAN YANG BERASPAL - DIMENSI : 800 x 800 x 1300MM (SPACE) - TEBAL DINDING BETON 150MM (K-225) - LANTAI DASAR TIDAK DIBETON, TETAPI DIBERI PASIR KERIKIL UNTUK RESAPAN - BAJA TULANGAN D-Ø10.00MM - SLACK CABLE (SPARE) 15.00-20.00M
2	KETENTUAN KHUSUS : - APABILA TANAH DASAR KERAS, MAKA DIROJOK/DIGEMBURKAN TANAHNYA AGAR DAYA RESAPANNYA LEBIH BAIK

APPROVAL MATRIX

PLANNING DEPT	PROJECT DEPT	OPERATION DEPT	CTO MYREPUBLIC
KRESNO AGUNG NUGROHO	PUJI YUWONO	ANGGA WISHNU WIJAYA	HENDRA GUNAWAN

LEGEND

HUB / CENTRAL OFFICE	HANDHOLE 40X40X60
SUB HUB / OPTICAL LINE TERMINAL	UNDERGROUND PEDESTAL
FIBER DISTRIBUTION TERMINAL	PROPOSES NEW POLE 9m
FIBER ACCESS TERMINAL / FAT **= SPLITTER CONFIG	PROPOSED NEW POLE 7m
OPTICAL TERMINATION BOX	GARDU PLN
HANDHOLE 80X80X130	RUMAH KABEL TELKOM
HANDHOLE 20X20X20	LABEL CABLE
ONT-RES (RESIDENTIAL) OPTICAL NETWORK TERMINAL	LARGE TEE RADIUS
ONT-MDU (BUILDING) OPTICAL NETWORK TERMINAL	CABLE RISER
FIBER OPTIC CLOSURE	BORING ASPAL / BORING ASPHALT WORK
FIGURE EIGHT / FIBER SPARE COIL	BORING TANAH / BORING SOIL WORK
Sidewalk Guy Down Guy	GALI TANAH / TRENCHING TYPE WORK

CABLE TYPE

AERIAL STRAND	FIBER 12/2T
UNDERGROUND STRAND	FIBER 24/4T
UG DROP DUCT	FIBER 36/6T
FEEDER CABLE ROUTE	FIBER 72/6T
FAT AREA LINE	FIBER 96/8T
	FIBER 144/12T
	FIBER 288/24T

MyRepublic
MYREPUBLIC PLAZA 1ST FLOOR
GREEN OFFICE PARK 6
BSD – TANGERANG 15345
Tel: +6221 319 2626

NAMA PROYEK
PROJECT NAME

STANDARD DESIGN FDT HANDHOLE CONCRETE (800x800x1300 MM) SPECIFICATION

DRAWING SIGN & CHECK

DIGAMBAR / DRAWN	TANGGAL / DATE	TANDA TANGAN / SIGNATURE
WAHYU SETIYONO	18/10/2023	
DIPERIKSA / CHECKED	**TANGGAL / DATE**	**TANDA TANGAN / SIGNATURE**
SAIPULLAH HAILANI	18/10/2023	

RIWAYAT DOKUMEN
DOCUMENT HISTORY

1. REV.01 – 092021
2. REV.02 – 092022
3. REV.03 – 102023

KATEGORI GAMBAR / DESIGN CATEGORY: UNDERGROUND	REVISI / REVISION: REV.03
SATUAN / UNIT: SATUAN DALAM MM	SKALA / SCALE: 1 ; 100
ARAH / DIRECTION: N	NO. DOKUMEN / DOCUMENT NO: 027/UG/EMR-PLG/X/2023
	NO. GAMBAR / DRAWING NO: 027