



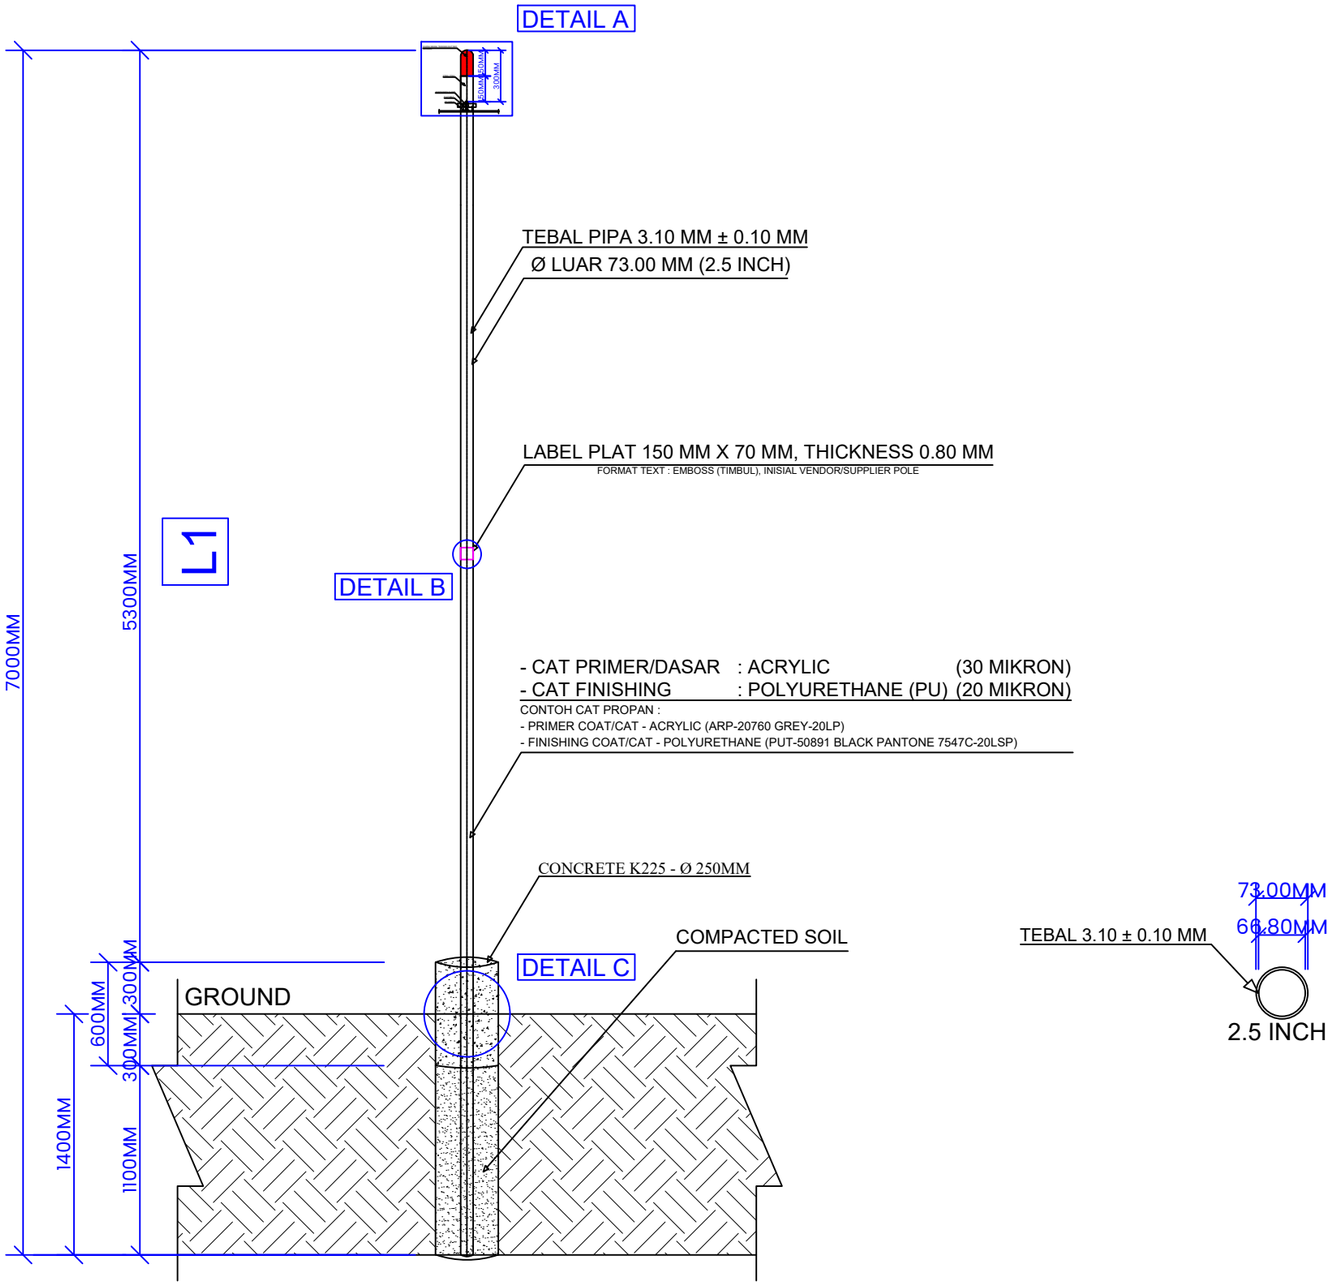


DETAIL A



KETENTUAN/FORMAT PENULISAN LABEL POLE :	
1	LABEL DENGAN BAHAN PLAT STAINLESS STEEL
2	PLAT STAINLESS STEEL BERWARNA SILVER
3	FONT : TYPE "ARIAL" ; BOLD ; FONT SIZE 50 pts ; CENTRE ; FONT COLOR "BLACK"
4	PENULISAN LABEL EMBOSS/TIMBUL (NAIK PADA PERMUKAAN PLAT)
5	PEMASANGAN LABEL PADA POLE/TIANG DENGAN LAS

DETAIL B



DETAIL C

SPESIFIKASI TEKNIS

1	BAHAN POLE/TIANG BESI BAJA BULAT TENGAH BERLUBANG TANPA STAGE
2	DIMENSI TIANG/POLE - POLE/TIANG 7M, TEBAL 2.5 INCH
3	SPESIFIKASI BERAT = ± 40.00 KG
4	TIANG/POLE DIAPLIKASIKAN UNTUK IMPLEMENTASI DI LAHAN YANG SEMPIT
5	PENGECATAN POLE/TIANG : A. CAT DASAR ANTI KARAT (ACRYLIC) B. CAT FINISHING (POLYURETHANE)
6	TOP POLE WARNA MERAH TERANG ATAU LIGHT RED (#FF0000)
7	INSTALASI LAPANGAN : UNTUK KEBUTUHAN HC DAN CLUSTER ISSUE TERKAIT PENANAMAN TIANG DENGAN DIAMETER 4 INCH

LEGEND

HUB / CENTRAL OFFICE	HANDHOLE 40X40X60
SUB HUB / OPTICAL LINE TERMINAL	UNDERGROUND PEDESTAL
FIBER DISTRIBUTION TERMINAL	PROPOSES NEW POLE 9m
FIBER ACCESS TERMINAL / FAT **= SPLITTER CONFIG	PROPOSED NEW POLE 7m
OPTICAL TERMINATION BOX	GARDU PLN
HANDHOLE 80X80X130	RUMAH KABEL TELKOM
HANDHOLE 20X20X20	LABEL CABLE
ONT–RES (RESIDENTIAL) OPTICAL NETWORK TERMINAL	LARGE TEE RADIUS
ONT–MDU (BUILDING) OPTICAL NETWORK TERMINAL	CABLE RISER
FIBER OPTIC CLOSURE	BORING ASPAL / BORING ASPHALT WORK
FIGURE EIGHT / FIBER SPARE COIL	BORING TANAH / BORING SOIL WORK
Sidewalk Guy Down Guy	GALI TANAH / TRENCHING TYPE WORK

CABLE TYPE

AERIAL STRAND	FIBER 12/2T
UNDERGROUND STRAND	FIBER 24/4T
UG DROP DUCT	FIBER 36/6T
FEEDER CABLE ROUTE	FIBER 72/6T
FAT AREA LINE	FIBER 96/8T
	FIBER 144/12T
	FIBER 288/24T

MyRepublic
MYREPUBLIC PLAZA 1ST FLOOR
GREEN OFFICE PARK 6
BSD – TANGERANG 15345
Tel: +6221 319 2626

NAMA PROYEK / PROJECT NAME
STANDARD DESIGN POLE 7 M – 2.5 INCH UNIFORM SPECIFICATION

DRAWING SIGN & CHECK

DIGAMBAR / DRAWN: WAHYU SETIYONO	TANGGAL / DATE: 07/11/2023	TANDA TANGAN / SIGNATURE
DIPERIKSA / CHECKED: SAIPULLAH HAILANI	TANGGAL / DATE: 07/11/2023	TANDA TANGAN / SIGNATURE

RIWAYAT DOKUMEN / DOCUMENT HISTORY
1. REV.01 – 092021
2. REV.02 – 092022
3. REV.03 – 102023

REF. PETA / MAP REF.: –	REVISI / REVISION: REV.01
SATUAN / UNIT: SATUAN DALAM MM	SKALA / SCALE: 1 ; 200
ARAH / DIRECTION: N	NO. DOKUMEN / DOCUMENT NO: 050/AE/EMR–PLG/XII/2023
	NO. GAMBAR / DRAWING NO: 050

APPROVAL MATRIX

PLANNING DEPT	PROJECT DEPT	OPERATION DEPT	CTO MYREPUBLIC
KRESNO AGUNG NUGROHO	PUJI YUWONO	ANGGA WISHNU WIJAYA	HENDRA GUNAWAN