

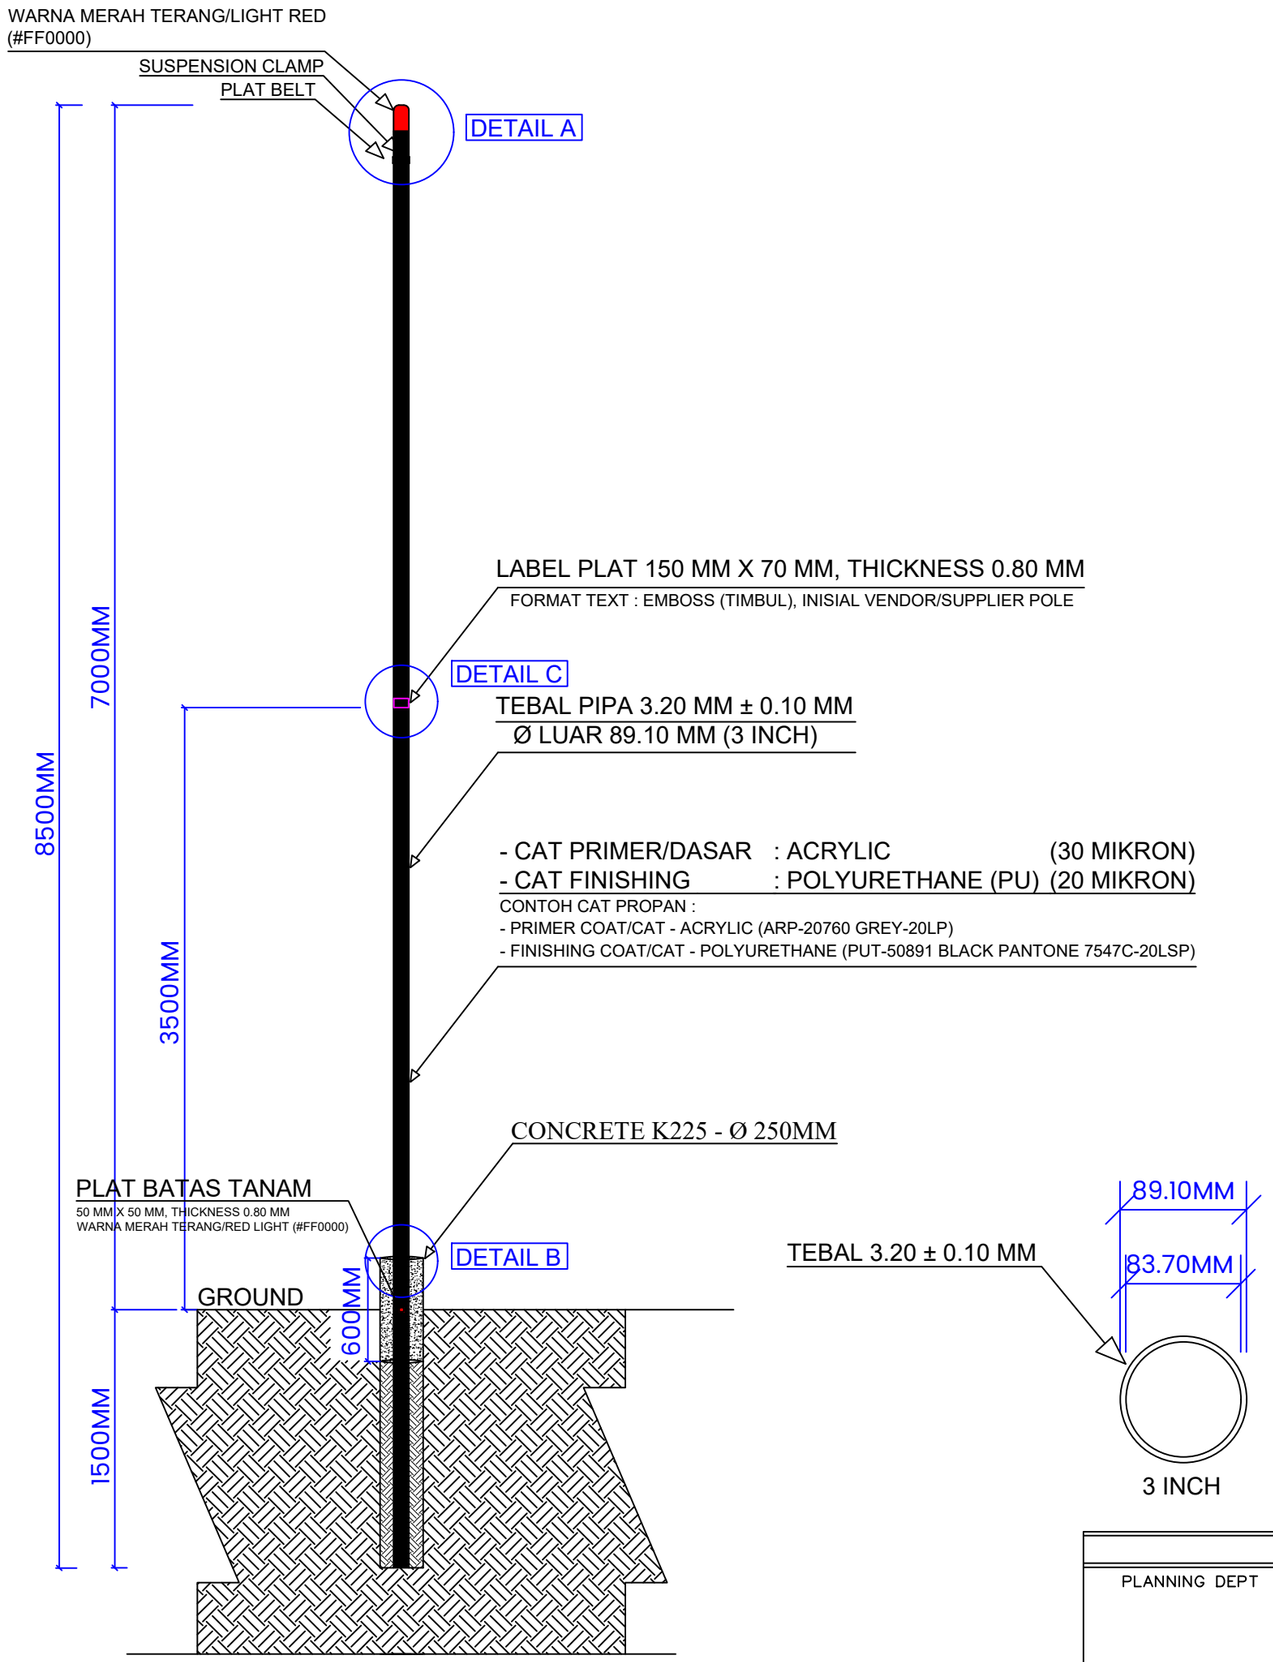


SPESIFIKASI TEKNIS

1	BAHAN POLE/TIANG BESI BAJA BULAT TENGAH BERLUBANG
2	TIANG/POLE 8.5 M : - TEBAL TIANG : 2.8 MM ± 0.1 MM - DIAMETER TIANG 8.5 M : Ø 3 INCH (SATU STAGE/SEGMENT LURUS)
3	SPESIFIKASI BERAT = MIN 50.00 KG
4	PENGECATAN POLE/TIANG : A. CAT DASAR ANTI KARAT (ACRYLIC) B. CAT FINISHING (POLYURETHANE)
5	TOP POLE WARNA MERAH TERANG ATAU LIGHT RED (#FF0000)
6	INSTALASI LAPANGAN : - UNTUK INSTALL FDT, FAT, ATAU JC - UNTUK INSTALASI CABLE ALL TYPE MAKSIMAL 4 CABLE (PER TIANG)
7	KONDISI SPESIAL : - DAPAT DIGUNAKAN INSTALL FDT & JC - DAPAT DIGUNAKAN INSTALL FAT & JC

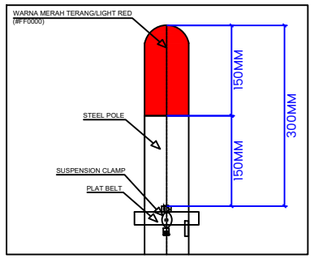

DETAIL A

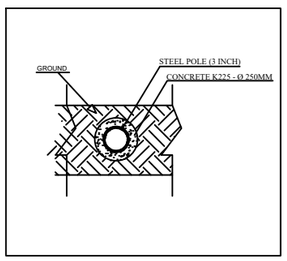

DETAIL B



KETENTUAN/FORMAT PENULISAN LABEL POLE :	
1	LABEL DENGAN BAHAN PLAT STAINLESS STEEL
2	PLAT STAINLESS STEEL BERWARNA SILVER
3	FONT : TYPE "POPPINS" ; BOLD ; FONT SIZE 50 pts ; CENTRE ; FONT COLOR "BLACK"
4	PENULISAN LABEL EMBOSS/TIMBUL (NAIK PADA PERMUKAAN PLAT)
5	PEMASANGAN LABEL PADA POLE/TIANG DENGAN LAS

DETAIL C

APPROVAL MATRIX

PLANNING DEPT	PROJECT DEPT	OPERATION DEPT	CTO MYREPUBLIC
KRESNO AGUNG NUGROHO	PUJI YUWONO	ANGGA WISHNU WIJAYA	HENDRA GUNAWAN

LEGEND

HUB / CENTRAL OFFICE	HANDHOLE 40X40X60
SUB HUB / OPTICAL LINE TERMINAL	UNDERGROUND PEDESTAL
FDT FIBER DISTRIBUTION TERMINAL	NP PROPOSES NEW POLE 9m
FAT FIBER ACCESS TERMINAL / FAT **= SPLITTER CONFIG	NP PROPOSED NEW POLE 7m
OTB OPTICAL TERMINATION BOX	PLN GARDU PLN
HH HANDHOLE 80X80X130	STO TELKOM RUMAH KABEL TELKOM
HH HANDHOLE 20X20X20	LABEL CABLE LABEL CABLE
ONT-RES (RESIDENTIAL) OPTICAL NETWORK TERMINAL	LARGE TEE RADIUS
ONT-MDU (BUILDING) OPTICAL NETWORK TERMINAL	CR CABLE RISER
FIBER OPTIC CLOSURE	BA BORING ASPAL / BORING ASPHALT WORK
FIGURE EIGHT / FIBER SPARE COIL	BT BORING TANAH / BORING SOIL WORK
Sidewalk Guy Down Guy	GT GALI TANAH / TRENCHING TYPE WORK

CABLE TYPE

AERIAL STRAND	FIBER 12/2T
UNDERGROUND STRAND	FIBER 24/4T
UG DROP DUCT	FIBER 36/6T
FEEDER CABLE ROUTE	FIBER 72/6T
FAT AREA LINE	FIBER 96/8T
	FIBER 144/12T
	FIBER 288/24T

MyRepublic
MYREPUBLIC PLAZA 1ST FLOOR
GREEN OFFICE PARK 6
BSD – TANGERANG 15345
Tel: +6221 319 2626

NAMA PROYEK
PROJECT NAME

STANDARD DESIGN POLE 8.5M 3INCH – 1 STAGE

DRAWING SIGN & CHECK

DIGAMBAR / DRAWN	TANGGAL / DATE	TANDA TANGAN / SIGNATURE
WAHYU SETIYONO	17/09/2024	
DIPERIKSA / CHECKED	**TANGGAL / DATE**	**TANDA TANGAN / SIGNATURE**
SAIPULLAH HAILANI	17/09/2024	

RIWAYAT DOKUMEN
DOCUMENT HISTORY

1. RELEASE DESIGN – 092024

KATEGORI GAMBAR / DESIGN CATEGORY	REVISI / REVISION
AERIAL	–
SATUAN / UNIT	SKALA / SCALE
SATUAN DALAM MM	1 ; 100
ARAH / DIRECTION: N	NO. DOKUMEN / DOCUMENT NO
	065/AE/EMR–PLG/IX/2024
	NO. GAMBAR / DRAWING NO
	65