



Unit : mm

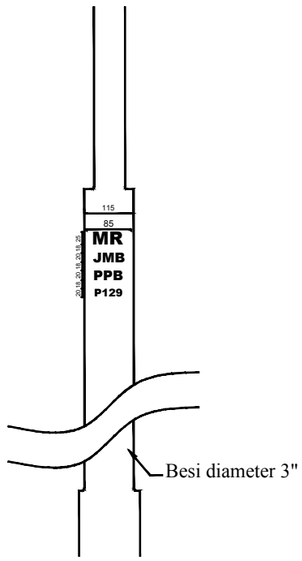

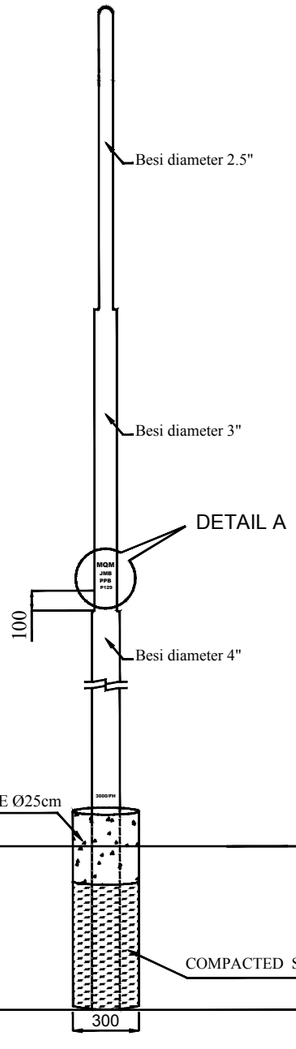

DETAIL A

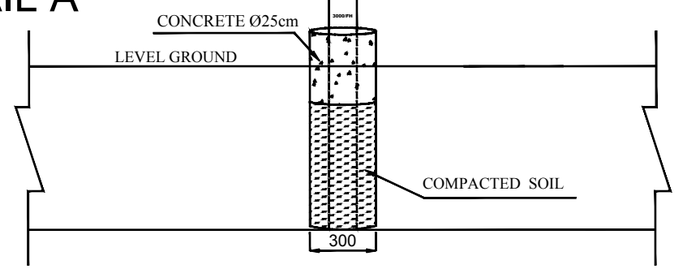

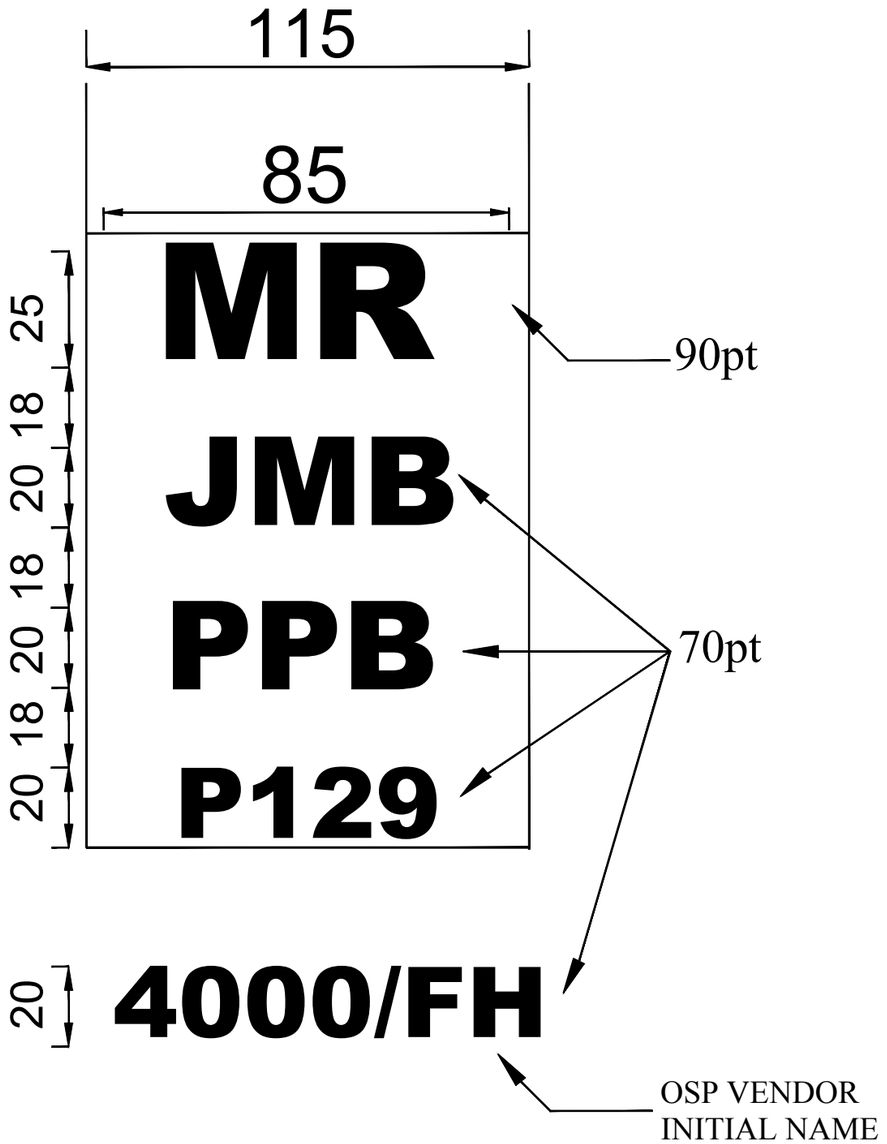

Notes :

1. Pole ID shall be using the paint method.
2. Pole ID shall be placed above the second joint as drawing,the length shall be 100mm from the bottom of pole ID to the second joint of pole.
3. Font Style : Poppins Black
4. Font Color : Silver Color or Black Color(depend on pole color)
5. Font Size : 90pt for (MR) and 70pt for (JMB, PPB, P129, and 3000/FH)
6. Painting method use foam,not spray.

LEGEND

HUB / CENTRAL OFFICE	HANDHOLE 40X40X60
SUB HUB / OPTICAL LINE TERMINAL	UNDERGROUND PEDESTAL
FIBER DISTRIBUTION TERMINAL	PROPOSES NEW POLE 9m
FIBER ACCESS TERMINAL / FAT **= SPLITTER CONFIG	PROPOSED NEW POLE 7m
OPTICAL TERMINATION BOX	GARDU PLN
HANDHOLE 80X80X130	RUMAH KABEL TELKOM
HANDHOLE 20X20X20	LABEL CABLE
ONT-RES (RESIDENTIAL) OPTICAL NETWORK TERMINAL	LARGE TEE RADIUS
ONT-MDU (BUILDING) OPTICAL NETWORK TERMINAL	CABLE RISER
FIBER OPTIC CLOSURE	BORING ASPAL / BORING ASPHALT WORK
FIGURE EIGHT / FIBER SPARE COIL	BORING TANAH / BORING SOIL WORK
Sidewalk Guy / Down Guy	GALI TANAH / TRENCHING TYPE WORK

CABLE TYPE

AERIAL STRAND	FIBER 12/2T
UNDERGROUND STRAND	FIBER 24/4T
UG DROP DUCT	FIBER 36/6T
FEEDER CABLE ROUTE	FIBER 72/6T
FAT AREA LINE	FIBER 96/8T
	FIBER 144/12T
	FIBER 288/24T

APPROVAL MATRIX

PLANNING DEPT	PROJECT DEPT	OPERATION DEPT	CTO MYREPUBLIC
KRESNO AGUNG NUGROHO	PUJI YUWONO	ANGGA WISHNU WIJAYA	HENDRA GUNAWAN

MyRepublic
MYREPUBLIC PLAZA 1ST FLOOR
GREEN OFFICE PARK 6
BSD – TANGERANG 15345
Tel: +6221 319 2626

NAMA PROYEK / PROJECT NAME
STANDARD DESIGN FEEDER POLE ID FOR SPRAYING PAINT ROLLOUT 2024

DRAWING SIGN & CHECK

DIGAMBAR / DRAWN	TANGGAL / DATE	TANDA TANGAN / SIGNATURE
WAHYU SETIYONO	23/10/2024	
DIPERIKSA / CHECKED	TANGGAL / DATE	TANDA TANGAN / SIGNATURE
SAIPULLAH HAILANI	23/10/2024	

RIWAYAT DOKUMEN / DOCUMENT HISTORY

KATEGORI GAMBAR / DESIGN CATEGORY: AERIAL	REVISI / REVISION: –
SATUAN / UNIT: SATUAN DALAM MM	SKALA / SCALE: 1 ; 200
ARAH / DIRECTION: N	NO. DOKUMEN / DOCUMENT NO: 074/AE/EMR-PLG/X/2024
	NO. GAMBAR / DRAWING NO: 074