


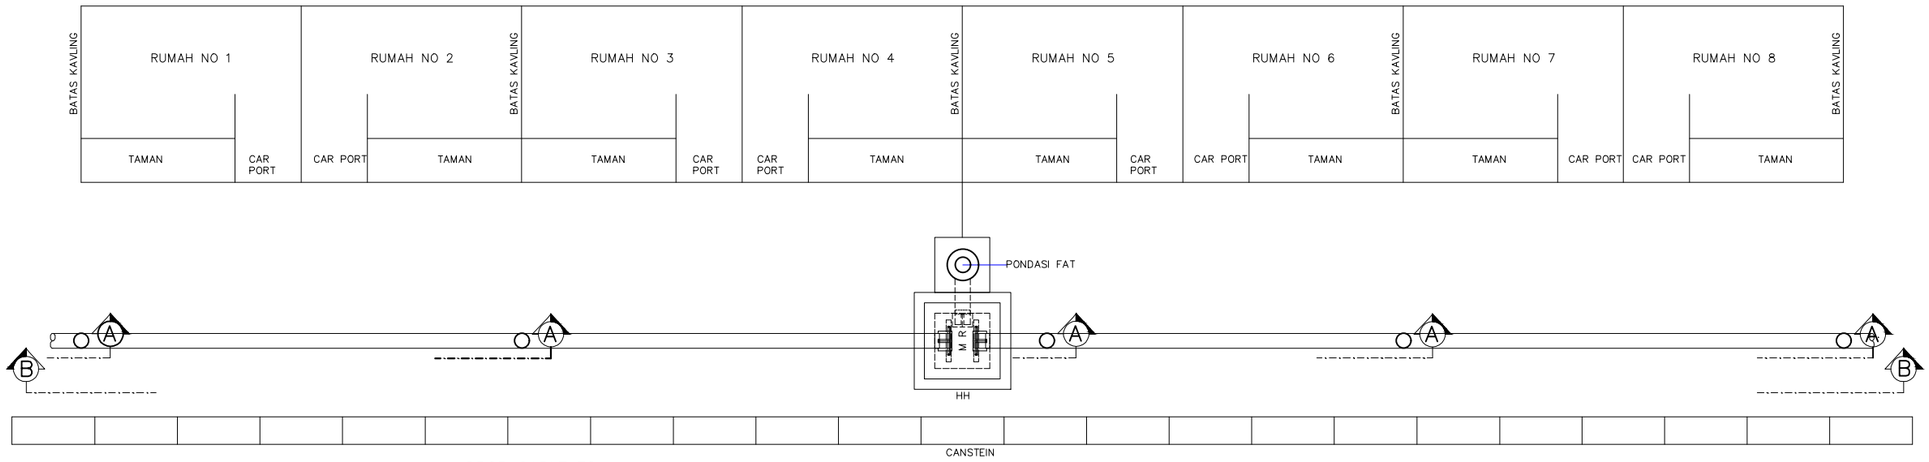


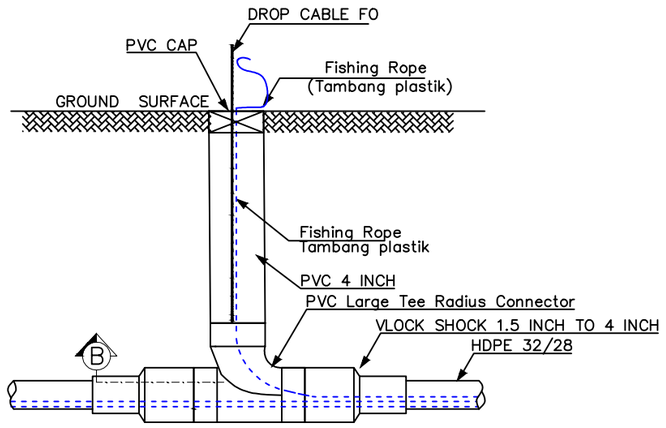

POTONGAN A - A

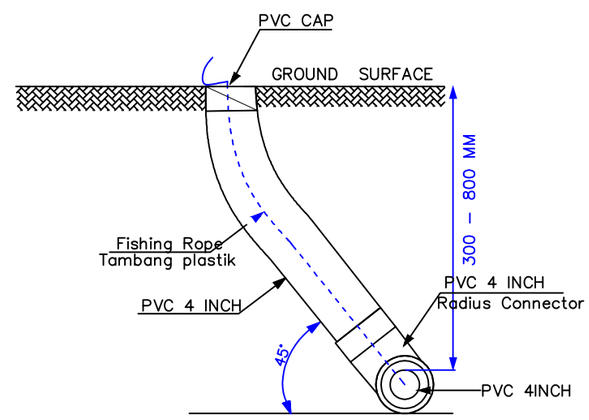

POTONGAN B – B

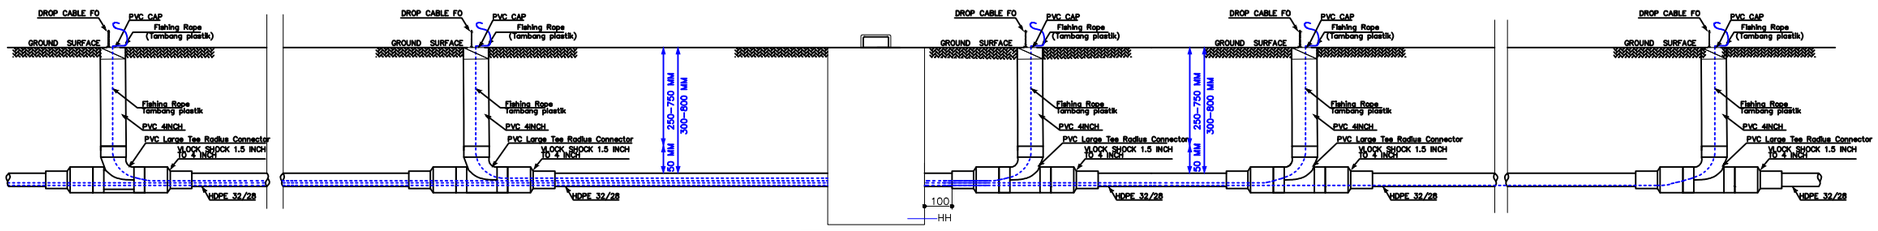

POTONGAN C - C

SPESIFIKASI TEKNIS

1 FUNGSIONAL LARGE TEE RADIUS :
- PENGGANTI HH PIT
- UNTUK CASES APABILA TIDAK BOLEH DILAKUKAN INSTALLASI HH PIT DI AREA TERSEBUT

2 KEDALAMAN TANAM :
- KEDALAMAN TANAM 300-800 MM, TERGANTUNG KONDISI LAPANGAN
- KEDALAMAN SAMBUNGAN (SHOCK PVC), 50 MM. SEHINGGA PANJANG PVC VERTIKAL :
  A. JIKA KEDALAMAN TRENCHING/BORING : 300 MM, MAKA PVC 250 MM
  B. JIKA KEDALAMAN TRENCHING/BORING : 800 MM, MAKA PVC 750 MM

APPROVAL MATRIX

PLANNING DEPT	PROJECT DEPT	OPERATION DEPT	CTO MYREPUBLIC
KRESNO AGUNG NUGROHO	PUJI YUWONO	ANGGA WISHNU WIJAYA	HENDRA GUNAWAN

LEGEND

HUB / CENTRAL OFFICE	HANDHOLE 40X40X60
SUB HUB / OPTICAL LINE TERMINAL	UNDERGROUND PEDESTAL
FDT FIBER DISTRIBUTION TERMINAL	NP PROPOSES NEW POLE 9m
FAT FIBER ACCESS TERMINAL / FAT **= SPLITTER CONFIG	NP PROPOSED NEW POLE 7m
OTB OPTICAL TERMINATION BOX	PLN GARDU PLN
HH HANDHOLE 80X80X130	STO TELKOM RUMAH KABEL TELKOM
HH HANDHOLE 20X20X20	LABEL CABLE LABEL CABLE
ONT–RES (RESIDENTIAL) OPTICAL NETWORK TERMINAL	LARGE TEE RADIUS
ONT–MDU (BUILDING) OPTICAL NETWORK TERMINAL	CR CABLE RISER
FIBER OPTIC CLOSURE	BA BORING ASPAL / BORING ASPHALT WORK
FIGURE EIGHT / FIBER SPARE COIL	BT BORING TANAH / BORING SOIL WORK
Sidewalk Guy / Down Guy	GT GALI TANAH / TRENCHING TYPE WORK

CABLE TYPE

AERIAL STRAND	FIBER 12/2T
UNDERGROUND STRAND	FIBER 24/4T
UG DROP DUCT	FIBER 36/6T
FEEDER CABLE ROUTE	FIBER 72/6T
FAT AREA LINE	FIBER 96/8T
	FIBER 144/12T
	FIBER 288/24T

MyRepublic
MYREPUBLIC PLAZA 1ST FLOOR
GREEN OFFICE PARK 6
BSD – TANGERANG 15345
Tel: +6221 319 2626

NAMA PROYEK / PROJECT NAME
STANDARD DESIGN LARGE TEE RADIUS – PVC 4 INCH INSTALLATION

DRAWING SIGN & CHECK

DIGAMBAR / DRAWN	TANGGAL / DATE	TANDA TANGAN / SIGNATURE
WAHYU SETIYONO	02/05/2025	
DIPERIKSA / CHECKED	TANGGAL / DATE	TANDA TANGAN / SIGNATURE
SAIPULLAH HAILANI	02/05/2025	

RIWAYAT DOKUMEN / DOCUMENT HISTORY
1. RELEASE DESIGN – 02 MAY 2025

KATEGORI GAMBAR / DESIGN CATEGORY: UNDERGROUND	REVISI / REVISION: –
SATUAN / UNIT: SATUAN DALAM MM	SKALA / SCALE: 1 ; 100
ARAH / DIRECTION: N	NO. DOKUMEN / DOCUMENT NO: 087/UG/EMR-PLG/VI/2025
	NO. GAMBAR / DRAWING NO: 087