

LABEL KABEL DISTRIBUSI

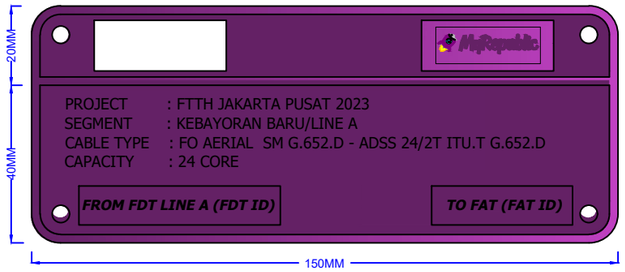

FONT STYLE : POPPINS (BOLD)
FONT SIZE : 13 pts
MATERIAL : MIKA
COLOR : BLACK LETTERS IN PURPLE BACKGROUND

NOTES :
a. LABEL CABLE DIPASANG PADA SATU SISI DI SEBELAH KIRI TIANG
b. JUMLAH LABEL CABLE YANG DIIMPLEMENTASIKAN : 10% DARI TOTAL TIANG (DISTRIBUSI)
c. NAMA SEGMENT MENYESUAIKAN LOKASI DAN CAPACITY MENYESUAIKAN DENGAN KAPASITAS KABEL

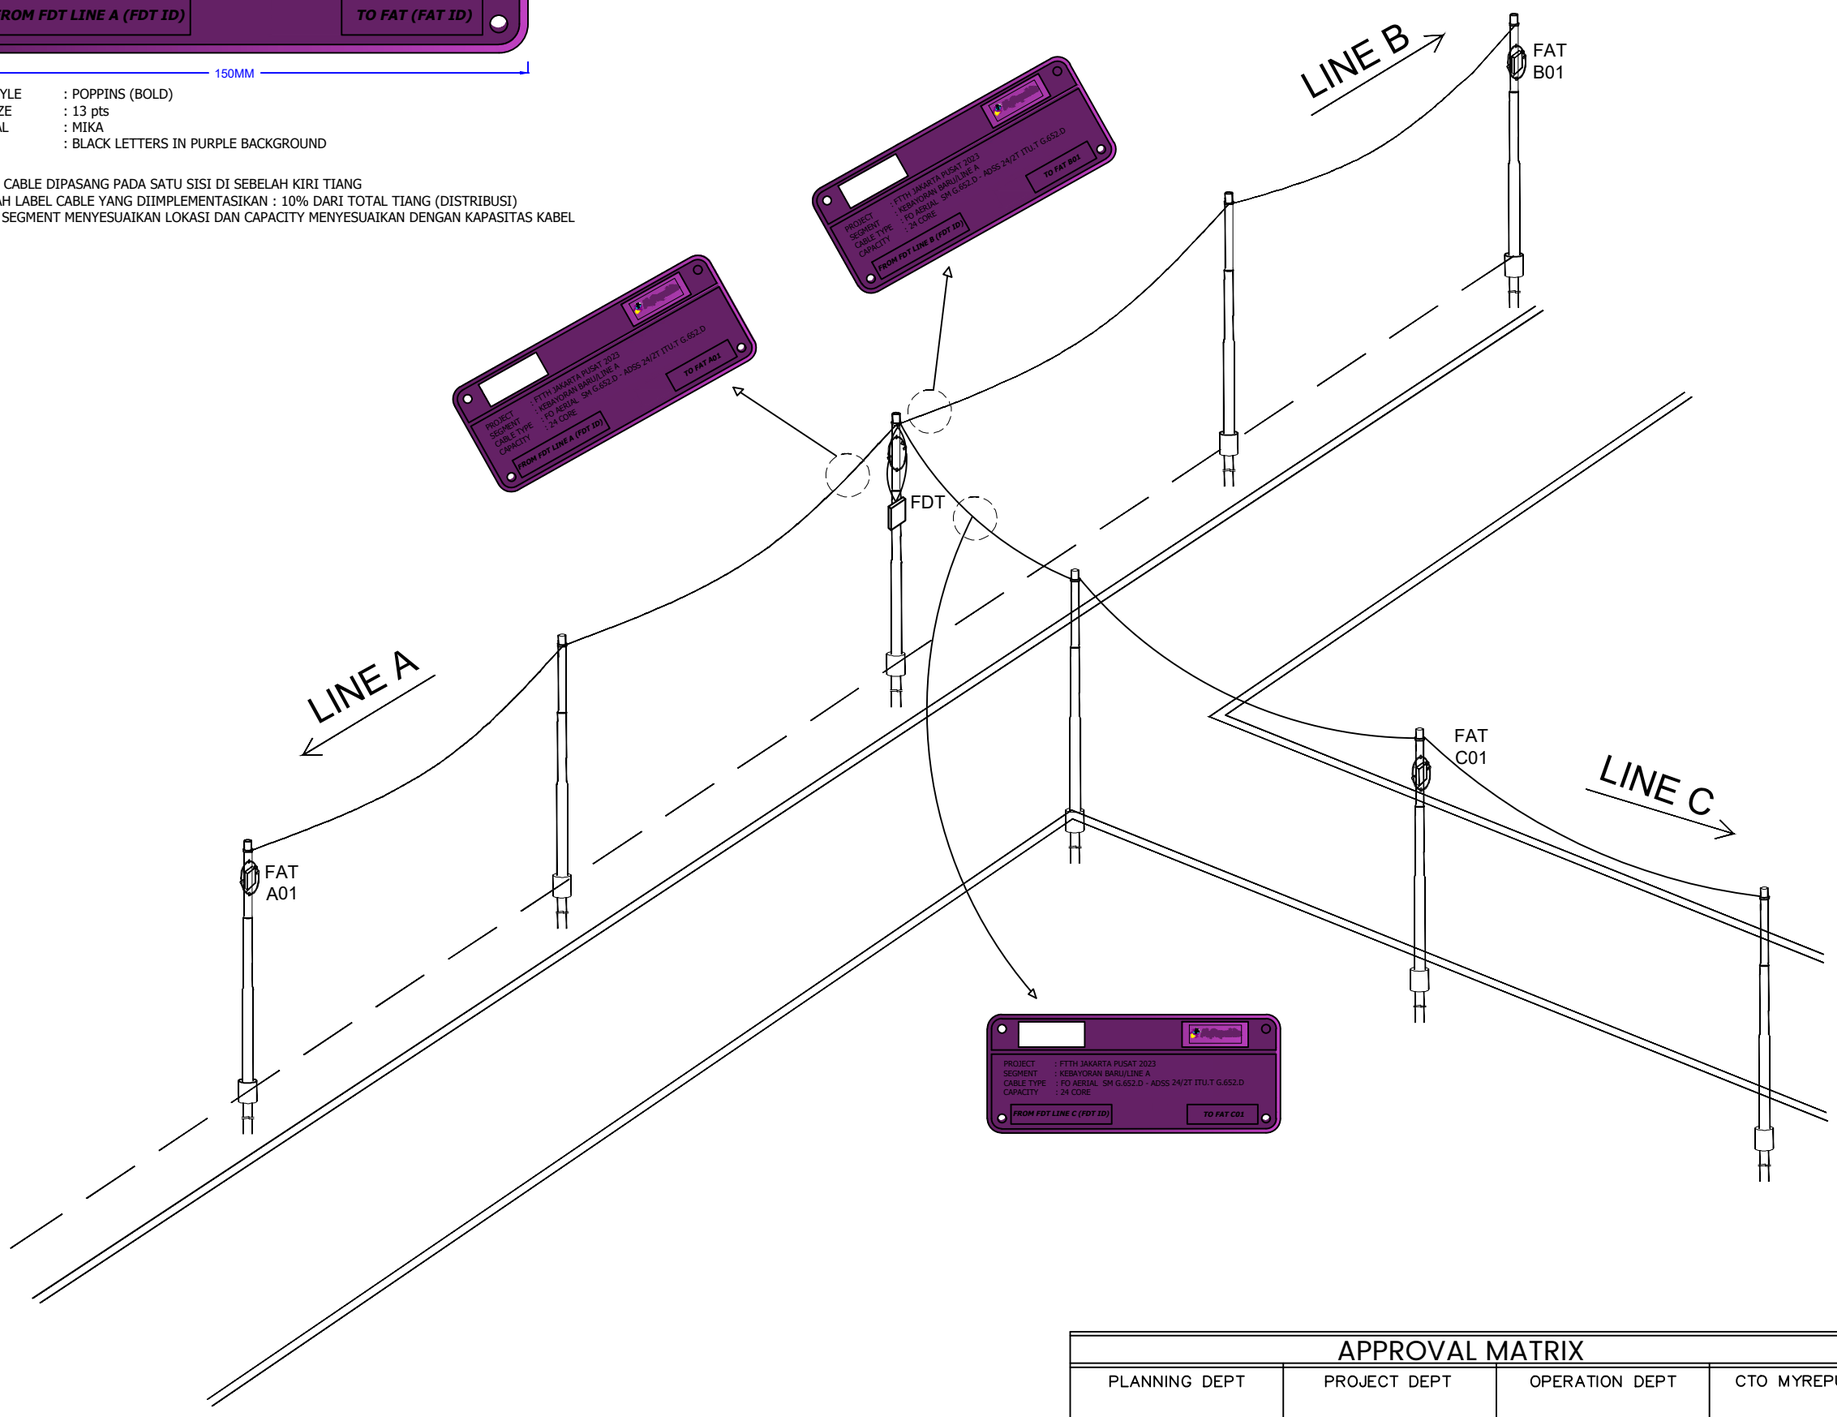

LEGEND

HUB / CENTRAL OFFICE	HANDHOLE 40X40X60
SUB HUB / OPTICAL LINE TERMINAL	UNDERGROUND PEDESTAL
FIBER DISTRIBUTION TERMINAL	PROPOSES NEW POLE 9m
FIBER ACCESS TERMINAL / FAT **= SPLITTER CONFIG	PROPOSED NEW POLE 7m
OPTICAL TERMINATION BOX	GARDU PLN
HANDHOLE 80X80X130	RUMAH KABEL TELKOM
HANDHOLE 20X20X20	LABEL CABLE
ONT-RES (RESIDENTIAL) OPTICAL NETWORK TERMINAL	LARGE TEE RADIUS
ONT-MDU (BUILDING) OPTICAL NETWORK TERMINAL	CABLE RISER
FIBER OPTIC CLOSURE	BORING ASPAL / BORING ASPHALT WORK
FIGURE EIGHT / FIBER SPARE COIL	BORING TANAH / BORING SOIL WORK
Sidewalk Guy / Down Guy	GALI TANAH / TRENCHING TYPE WORK

CABLE TYPE

AERIAL STRAND	FIBER 12/2T
UNDERGROUND STRAND	FIBER 24/4T
UG DROP DUCT	FIBER 36/6T
FEEDER CABLE ROUTE	FIBER 72/6T
FAT AREA LINE	FIBER 96/8T
	FIBER 144/12T
	FIBER 288/24T

MYREPUBLIC PLAZA 1ST FLOOR
GREEN OFFICE PARK 6
BSD – TANGERANG 15345
Tel: +6221 319 2626

NAMA PROYEK
PROJECT NAME

STANDARD DESIGN LABEL CABLE DISTRIBUTION TYPE A

DRAWING SIGN & CHECK

DIGAMBAR / DRAWN	TANGGAL / DATE	TANDA TANGAN / SIGNATURE
WAHYU SETIYONO	18/10/2023	
DIPERIKSA / CHECKED	**TANGGAL / DATE**	**TANDA TANGAN / SIGNATURE**
SAIPULLAH HAILANI	18/10/2023	

RIWAYAT DOKUMEN
DOCUMENT HISTORY

1. REV.01 – 092021
2. REV.02 – 092022
3. REV.03 – 102023

KATEGORI GAMBAR / DESIGN CATEGORY: AERIAL	REVISI / REVISION: REV.03
SATUAN / UNIT: SATUAN DALAM MM	SKALA / SCALE: 1 ; 100
ARAH / DIRECTION: N	NO. DOKUMEN / DOCUMENT NO: 019/AE/EMR-PLG/X/2023
	NO. GAMBAR / DRAWING NO: 019

APPROVAL MATRIX

PLANNING DEPT	PROJECT DEPT	OPERATION DEPT	CTO MYREPUBLIC
KRESNO AGUNG NUGROHO	PUJI YUWONO	ANGGA WISHNU WIJAYA	HENDRA GUNAWAN